


TECHNICAL DATA SHEET

AGRITECH 15W30

MULTI-PURPOSE LUBRICANT FOR PUBLIC WORKS TRACTORS AND MACHINERY



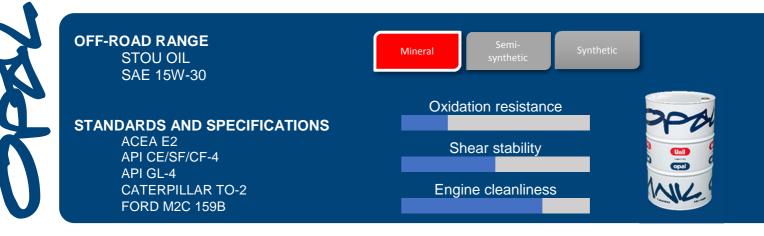

APPLICATIONS

AGRITECH 15W30 is a multi-purpose oil (STOU type) for lubricating all-season mechanical parts of tractors, farming machinery, public works machinery, and related equipment.

AGRITECH 15W30 is used to lubricate the following:

- All types of engine (petrol/diesel), supercharged or not
- Mechanical transmissions equipped with wet disc brakes
- Gearboxes, differentials, axles, speed reducers
- Lifting gear and hydraulic circuit supports

BENEFITS

- > Remarkable anti-wear capability for prolonging engine life, transmission components and hydraulic circuits.
- > Anti-corrosion and anti-rust properties for protecting metals and alloys of mechanical components.
- > Neutrality vis-à-vis joints
- > Streamlining and simplification of the supply and storage of lubricants.

N/C

アノイ





2212

PERFORMANCE

ENGINE

ACEA E2-96 Issue 5 API CE/SF/CF-4 CCMC D4/G2 MIL-L-2104 D MB 227.1/228.1

MULTI-PURPOSE

MASSEY FERGUSON MF 1139 JOHN DEERE J27 FORD M2C 159B

PERFORMANCE LEVELS

MECHANICAL TRANSMISSIONS AND WET DISC BRAKES API GL-4 ALLISON C3/C4 CATERPILLAR TO-2 MASSEY FERGUSON MF 1127A/1135

CHARACTERISTICS

CHARACTERISTICS	UNITS	METHODS	TYPICAL DATA
SAE grade	-	-	15W-30
Density at 15°C	kg/m3	NF T 60101	876
Kinematic viscosity at 40°C	mm²/s	NF T 60100	79.4
Kinematic viscosity at 100°C	mm²/s	NF T 60100	10.9
Viscosity index	-	NF T 60136	125
CCS viscosity at -20°C	mPa.s	NF T 60152	4290
Pour point	°C	NF T 60105	-34
Flash point	°C	NF T 60118	234
TBN	mg KOH/g	ASTM D 2896	10.7

The above data are provided on an indicative basis only.

HEALTH, SAFETY AND ENVIRONMENT

Disposal must be carried out in compliance with the rules governing the disposal of used lubricants.

Must be stored away from bad weather conditions.

For further details, our Technical Department is available to assist you.