




# MYTHIC 20W50


OILS FOR 4-STROKE MOTORCYCLES



**MOTORCYCLE RANGE**  
4-STROKE ENGINE  
MINERAL  
SAE 20W-50



**INTERNATIONAL STANDARDS**  
API SL  
JASO MA2

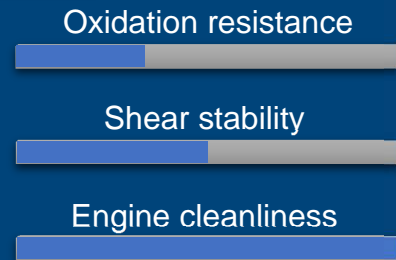

## APPLICATIONS

**MYTHIC 20W50** is an oil that is specially formulated to fulfil the requirements of 4-stroke motorcycle engines running in difficult conditions whatever the season.


**MYTHIC 20W50** provides extra protection for the gearbox/clutch assembly while complying with the JASO MA2 standard. This requirement ensures optimal levels of friction for wet clutches, thereby preventing clutch slip.

**MYTHIC 20W50** is perfectly suited to HARLEY-DAVIDSON motorcycles. Also suitable for all engines for which the manufacturer recommends or authorises the use of an SAE 20 W-50 API SJ or SL oil

## BENEFITS

- **Exceptional resistance of the oil** at high temperature and high engine speeds. The SAE 50 grade when hot and the special additives create a protective layer that protects the engine and gearbox parts so that they are protected from wear and the oil consumption is controlled more effectively.
- **Excellent oxidation resistance** whatever the temperature variation, which means that the intervals between oil changes can be extended.
- **High detergent and dispersant properties** that prevent the formation of deposits, thereby keeping the engine clean.
- **Suitable friction properties** that comply with the JASO MA2 requirements, thereby preventing clutch slip and the premature wear of the disks. Guaranteed transmission of power.

OPAL  
20W  
50  
OPAL  
20W  
50  
OPAL  
20W  
50

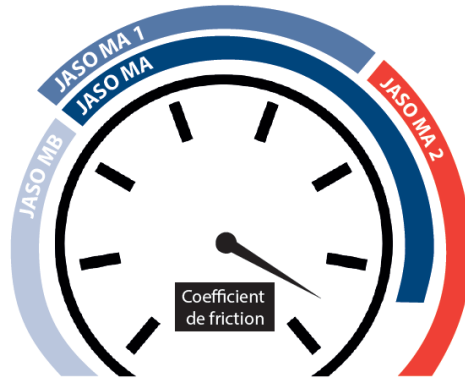

## PERFORMANCE

PERFORMANCE LEVELS

API SL  
JASO MA2

## CHARACTERISTICS

CHARACTERISTICS	UNITS	METHODS	TYPICAL DATA
SAE grade	-	-	<b>20W-50</b>
Colour	-	visual	Amber-coloured
Density at 15°C	kg/m <sup>3</sup>	NF T 60101	886
Kinematic viscosity at 40°C	mm <sup>2</sup> /s	NF T 60100	176.8
Kinematic viscosity at 100°C	mm <sup>2</sup> /s	NF T 60100	19.3
Viscosity index	-	NF T 60136	125
CCS viscosity at -25°C	mPa.s	ASTM D 2602	9215
Noack volatility	%	ASTM D 2896	6.7
Pour point	°C	NF T 60105	-30
Flash point	°C	NF T 60118	232
TBN	mg KOH/g	ASTM D 2896	7.6

*The average specifications provided are approximate values*

## HEALTH, SAFETY AND ENVIRONMENT

Disposal must be carried out in compliance with applicable rules for the waste disposal of used oil.

**Keep away from bad weather conditions.**

Our technical department is at your disposal to give you the advice you require.