



RACING GEAR GL4-5


GEARBOX OIL



MOTORCYCLE RANGE
GEARBOX
SEMI-SYNTHETIC
SAE 75W-90

INTERNATIONAL STANDARDS
API GL-4 & GL-5

Mineral	Semi-synthetic	Full synthetic
---------	-----------------------	----------------

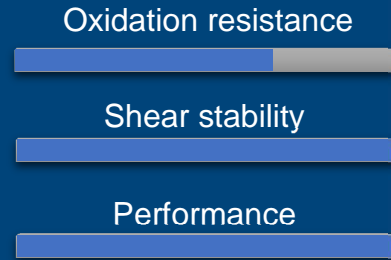

APPLICATIONS

RACING GEAR GL4-5 is a semi-synthetic oil that is particularly suitable for lubricating the gearboxes of 2-stroke and 4-stroke motorcycles.

RACING GEAR GL4-5 is to be used when the manufacturer recommends an SAE 75W-90 or 80W-90 grade of an API GL-5 or API GL-4 oil.

BENEFITS

- **Excellent extreme pressure and anti-wear performance** providing maximum protection for pinions and gears under extremely high stresses.
- **High level of protection for gearboxes** at high temperatures and reduction in overheating caused by a low quantity of oil in the sump.
- **Compatible with the different materials and elastomers.** Protects against rust and corrosion.
- **Excellent fluidity at low temperature.**

PERFORMANCE

PERFORMANCE LEVELS

API GL-4
API GL-5

OPAL
75W-90
75W-90
OPAL
75W-90
75W-90



CHARACTERISTICS

CHARACTERISTICS	UNITS	METHODS	TYPICAL DATA
SAE grade	-	-	75W-90
Colour	-	visual	Amber-coloured
Density at 15°C	kg/m ³	NF T 60101	893
Kinematic viscosity at 40°C	mm ² /s	NF T 60100	100.3
Kinematic viscosity at 100°C	mm ² /s	NF T 60100	16.2
Viscosity index	-	NF T 60136	174
Pour point	°C	NF T 60105	-45
Flash point	°C	NF T 60118	178
TBN	mg KOH/g	ASTM D 2896	10.4
Sulfated ash content	% mass	NF T 60143	1.03

The average specifications provided are approximate values

HEALTH, SAFETY AND ENVIRONMENT

Disposal must be carried out in compliance with applicable rules for the waste disposal of used oil.

Keep away from bad weather conditions.

Our technical department is at your disposal to give you the advice you require.